

**TVT**

**Secure The World With You**



# TD-9426S2

**2 MP Network IR Water-proof  
Bullet Camera**

**TVT**

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay  
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong  
Province, P.R.China


Tel: +86-755-36995888

Fax: +86-755-33104777

Web site: <http://en.tvt.net.cn>

E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)


## 2 MP Network IR Water-proof Bullet Camera

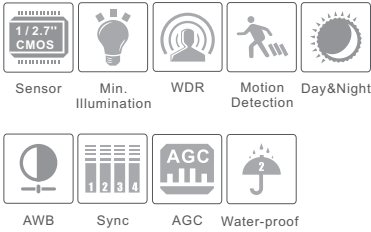

### Features

- 2MP (1920 × 1080) full real time coding
- Max. resolution: 1920 × 1080
- ICR auto switch, true day / night
- Up to 100m IR night view distance optional
- Excellent dot matrix LED IR lights, small size, efficient heat dissipation, long lifespan
- 3D DNR, digital WDR
- ROI coding
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection
- Support dual streams

### Dimensions

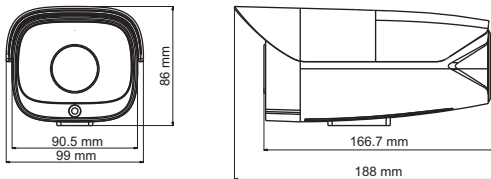

### Available Accessories



TD-YZJ0102



TD-YZJ0101

### Specifications

Model	TD-9426S2		
<b>Specifications</b>			
<b>Camera</b>			
Image Sensor	1 / 2.7 "CMOS		
Image Size	1920 × 1080		
Electronic Shutter	1 / 25 s ~ 1 / 100000 s		
Min. Illumination	0.007lux @F1.2, AGC ON; 0 lux with IR		
Lens	3.6 mm @ F2.0, horizontal field of view : 97° 6 mm @ F1.6, horizontal field of view : 54.5° 8 mm @ F2.2, horizontal field of view : 42.3° 12 mm @ F2.0, horizontal field of view : 26.2°		
Lens Mount	M12		
Day & Night	ICR		
Wide Dynamic Range	Digital WDR		
Digital NR	3D DNR		
<b>Image</b>			
Video Compression	H.265 / H.264 / MJPEG		
H.265 Compression Standard	Main Profile@Leve4.1 High Tier		
Resolution	1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF, 480×240		
Main Stream	60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )		
Bit Rate	256Kbps ~ 5Mbps		
Encode Mode	VBR / CBR		
Quality	Five levels under VBR; Freely adjustable under CBR		
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser		
ROI	Yes		
<b>Interfaces</b>			
Network	RJ45		
<b>Functions</b>			
Remote Monitoring	Web browsing, CMS remote control		
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission		
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP		
Storage	Network remote storage		
Smart Alarm	Motion alarm		
IR Distance	20 ~ 30 m	30 ~ 50 m	70 ~ 100 m
Water-proof	IP66		
<b>Others</b>			
Power Supply	DC12V	DC12V (PoE power supply optional)	DC12V
Power Consumption	< 9.5W		
Operating Environment	- 30°C ~ 60°C, ≤95% humidity		
Dimensions ( mm )	99 × 188 × 86		
Weight ( net )	440g		
Installation	Wall mounting		

### Available Model

Available Model	TD-9426S2 ( D / AR2 )
	TD-9426S2 ( D / AR3 )
	TD-9426S2 ( D / PE / AR3 )
	TD-9426S2 ( D / AR7 )