

TVT

Secure The World With You

www.tvt.net.cn



TD-9554E2

**5 MP Network IR Water-proof
Dome Camera**

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn


5 MP Network IR Water-proof Dome Camera

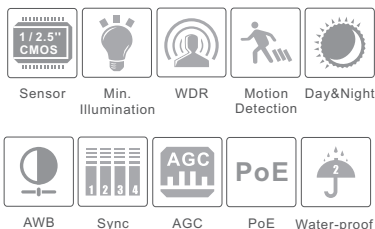

Features

- 5MP (2592 × 1944) H.265 full real time coding
- Max. resolution: 2592 × 1944
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Support CVBS video output and one-way audio
- PoE power supply optional
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams
- Support smart analysis, including object removal detection, line crossing detection, intrusion detection, etc.

Dimensions

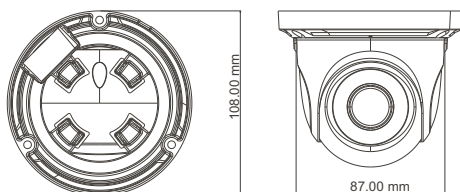

Available Accessories



Specifications

Model	TD-9554E2
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Image Size	2592×1944
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed iris
Min. Illumination	0.03 lux @F1.2, AGC ON; 0 lux with IR
Lens	3.6 mm @F1.6, horizontal field of view: 79°
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital NR	2D / 3D DNR
Angle Adjustment	Any angle
Image	
Video Compression	H.265 / H.264 / MJPEG
H.265 Compression Standard	Main Profile @Leve4.1 High Tier
Resolution	5MP (2592×1944), 4MP (2560×1440), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream	60Hz : 5MP(1 ~ 30fps) / 4MP(1 ~ 30fps) / 1080P(1 ~ 60fps) / 720P(1 ~ 30fps) 50Hz : 5MP(1 ~ 25fps) / 4MP(1 ~ 25ps) / 1080P(1 ~ 50fps) / 720P(1 ~ 25fps)
Bit Rate	128 Kbps ~ 10 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression	G711A / U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	CVBS video output (BNC × 1)
Audio	MIC IN × 1
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	Network remote storage
Smart Alarm	Motion alarm
PoE	Optional
IR Distance	10 ~ 20m
Water-proof	IP66
Others	
Power Supply	DC12V (PoE power supply optional)
Power Consumption	< 6W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions (mm)	Φ 87 × 108
Weight (net)	422g
Installation	Pendent mounting (Wall mounting available with the junction box and bracket

Available Model

Available Model	TD-9554E2 (D / IR1)
	TD-9554E2 (D / PE / IR1)