





PoE Switch

24+2 CCTV PoE Switch



TD-2402EG

- Main Ports: 24x100Mbs downlink Ports ;
- Main Ports: 2x1000Mbs uplink Ports;
- Main Ports: 2 Gigabit SFP uplink Ports;
- Protection:Superior lightning protection(6KV);
- Bandwidth: 8.8 Gbps(No block)
- Operation:plug and play, no any settings needed.
- Up to 250 meter transmission at "Extend"model;



Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Te I: +86-755-36995888

Fax: +86-755-33104777


SPECIFICATIONS

Model	TD-2402EG
Downstream Ports	24*10/100Base-TX (PoE)
Uplink Ports	2*10/100/1000Base-TX /2 Gigabit SFP Ports
Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3X
Switch Capacity	8.8Gbps
Memory Buffer	4.1M
MAC Table	8k
PoE Standard	802.3af/at
Power Pin Assignment	12(+) 36(-)
PoE Power Output	15.4 watts
Total power	250 watts(POE Ports:1~24)
Lightning protection	6KV
Frame filtering and transmission rate	10M : 14,880pps/100M : 148800pps /1000M : 1488095pps
Power Supply	250W built-in-power Adaptor
Work temperature	0℃~55℃
Storage temperature	-20℃~70℃
Humidity(Non-condensin)	10%-90%
Dimension (L×W×H)	440mm×270mm×44mm
Weight	2.8Kg
Regulator	CE、FCC

BACK PANEL



APPLICATION

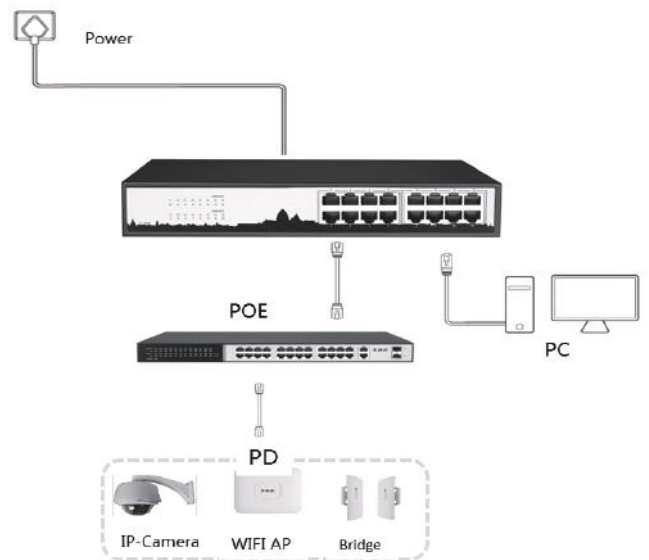

INDICATOR STATUS

Indicator	Indicator Description	Color	Work status	Description
POWER	Power indicator	Red	Solid	Power is normal
			Off	No power, the power switch is not turned on, power supply is abnormal
POE	POE power indicator	Yellow	Solid	The corresponding RJ45 port is connected to the powered device and the power supply is normal
			Off	The corresponding RJ45 port is not connected to the powered device or the power supply is abnormal
LINK/ACT	Connection indicator	Green	Blinking	A valid link is established
			Off	An invalid link is established