


# CP- UNC-TH31ZL5-VMD

3 MP Full HD WDR IR Bullet Camera - 50Mtr.

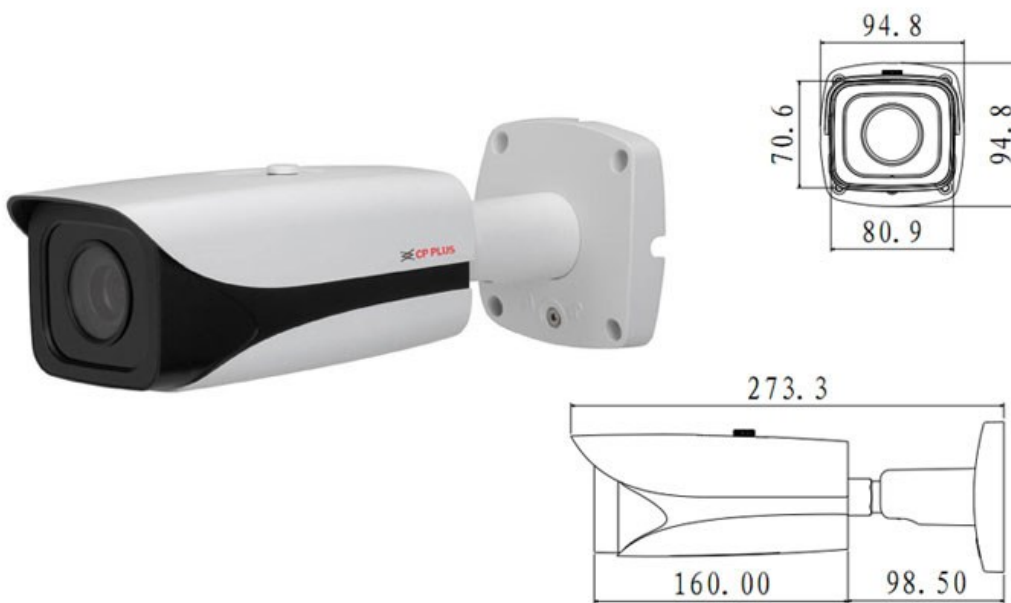

## Main Features

- 1/2.8" 3MP PS CMOS Image Sensor
- Max 50/60fps@3MP
- H.265 /H.264/ MJPEG stream encoding
- WDR (upto140dB), Day/Night (ICR), Defog, EIS, ROI, 3D-DNR, AWB, AGC, BLC
- 2.7 ~13.5mm Motorized Lens
- IR Range of 50 Mtrs, IP67,IK10, PoE+, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-TH31ZL5-VMD

3 MP Full HD WDR IR Bullet Camera - 50Mtr.



## Feature

Image Sensor  
 Effective Pixels  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Video Output  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Compression  
 Audio Output  
 Alarm IN  
 Alarm Out  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 IR

## Specification

1/2.8" 3MP Progressive scan CMOS  
 2048(H) x 1536(V)  
 0.005Lux/ F1.4( Color), 0Lux/ F1.4(IR on)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Sunny/Night/Outdoor/Customized  
 2.7 ~13.5mm Motorized Lens  
 Auto/Manual  
 H.265/H.264/MJPEG  
 More than 50dB  
 BLC/ HLC/ WDR(140dB)  
 Main Stream: 3MP(1~50/60fps), Sub Stream: D1 (1 ~ 50/60fps), Third Stream: 1080P (1~50/60fps)  
 3MP(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) /CIF(352x 288)  
 1 port  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Supports  
 1 Channel  
 G.711a / G.711u/AAC  
 1 Channel  
 2 Channel In  
 1 Channel Out  
 H.264: 40K ~ 10Mbps  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect, People counting, Heat map  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 50 Mtr.



# CP- UNC-TH31ZL5-VMD

3 MP Full HD WDR IR Bullet Camera - 50Mtr.



## Feature

Smart Phone  
Micro SD  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

iPhone, iPad, Android Phone  
Max 128GB  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE+ (802.3at)  
<13W  
IP67 & IK10  
273.3mm × 94.8mm× 94.8mm  
1.4 Kg.