
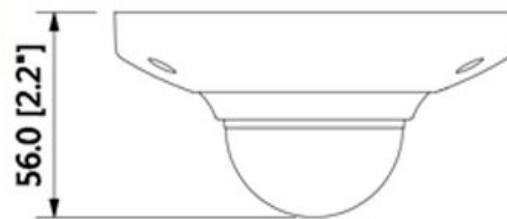


CP- UNC-EE51C-MD**5MP Full HD Panaromic Network Fisheye Camera****Main Features**

- 1/2.7" 5MP progressive scan CMOS Image Sensor
- H.265 and H.264 triple-stream encoding
- Max. 25fps@5MP(2592×1944) , Max. 25/30fps@3MP(2048×1520)
- WDR(120dB), Day/Night (ICR) Electronic, 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 1.4mm fixed lens
- Built-in Mic, IP67, IK08, SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

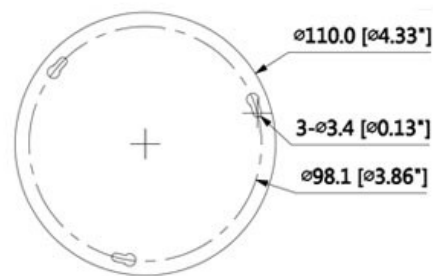

CP- UNC-EE51C-MD**5MP Full HD Panoramic Network Fisheye Camera****Feature**

Image Sensor

Minimum Illumination

Effective Pixels

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Angle of View

Back Light Compensation

Video Compression

S/N Ratio

Video Streaming

Resolution

Digital Zoom

Motion detection

Privacy Mask

ICR

ROI

Audio Compression

Bit Rate

Interface

Protocol

Smart Detection

Ethernet

User Account

Smart Phone

Micro SD

Audio

Specification

1/2.7" 5MP progressive scan CMOS

0.02Lux/F1.6(Color,1/3s,30IRE) 0.2Lux/1.6(Color,1/30s,30IRE) 0.05Lux/F1.6(B/W,1/3s,30IRE)
0.5Lux/1.6(B/W,1/30s,30IRE)

2592(H) x 1944(V)

Auto/Manual, 1/3(4)~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

1.4mm

Auto/Manual

H: 180°, V: 180°

BLC / HLC / WDR(120dB)

H.265+/H.265/H.264+/H.264

More than 50dB

Main Stream: 5MP(1~25fps), Sub Stream: D1(1~25/30fps)

5MP(2592×1944)/3MP(2048×1536)/ UXGA(1600×1200)/1.3MP(1280×960)/ D1
(704×576/704×480)/CIF(352×288/352×240)

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Auto (electronic)/Color/B/W

Off / On (4 Zone)

G.711a/ G.711Mu/ AAC/ G.726

H.265: 14~9984Kbps, H.264: 24~10240Kbps

1 RJ45

HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS;
UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP; ONVIF, PSIA, CGI

Tripwire ,Intrusion, Heat map

RJ-45 (10/100Base-T)

10 Users /20 Users

iPhone, iPad, Android Phone

Micro SD, Max 128GB

Built-in Mic

 **CP- UNC-EE51C-MD****5MP Full HD Panaromic Network Fisheye Camera****Feature**

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

-30°C~+60°C, Less than 95% RH
DC12V, PoE(802.3af)
<3.4W
IP67 & IK08
Φ110mm×56mm
0.38 kg