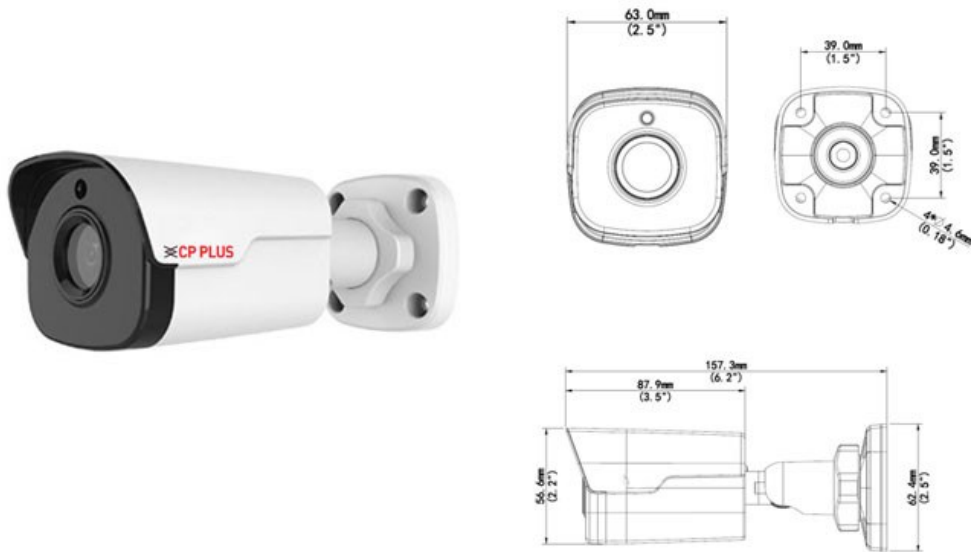


CP- VNC-T51R3C-D**5 MP Full HD WDR Array Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 5MP PS CMOS Image Sensor
- 5MP(2592 x 1944): Max. 25fps
- Ultra 265,H.265, H.264, MJPEG Triple-stream Encoding
- WDR(120dB), Day/Night(ICR), 2D/3D-DNR,Corridor mode, ROI, Digital Defog, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm optional)
- Array Range of 30 Mtrs, Smart IR, IP67, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

CP- VNC-T51R3C-D

5 MP Full HD WDR Array Bullet Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Angle of View
 DORI Distance
 Back Light Compensation
 Video Compression
 Video Streaming
 Resolution
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Compression
 Audio
 Protocol
 Dewarping
 Ethernet
 IR
 OSD
 Operating Temperature
 Humidity
 Power Source

Specification

1/2.7" 5MP Progressive scan CMOS
 Colour: 0.005Lux (F1.6, AGC ON) 0 Lux with IR
 Auto/Manual, 1~1/100000 s
 Auto/Manual
 3.6mm (6mm Optional)
 Auto/Manual
 3.6mm- 79.7° (H), 51.8° (V), 98.1° (O) ; 6mm- 50.5° (H), 35.9° (V), 62.1° (O)
 3.6mm- 90 Detect (m) , 36 Observe (m), 18 Recognize (m), 9 Identify (m)
 6mm- 135 Detect (m) , 54 Observe (m), 27 Recognize (m), 13.5 Identify (m)
 BLC / HLC / WDR(120dB)
 Ultra 265,H.265, H.264, MJPEG
 Triple
 2592 x 1944
 Main Stream: 5MP: Max. 20 fps, 5MP: Max. 25fps(WDR OFF), 4MP: Max. 30fps, 3MP: Max. 30fps, 2MP: Max. 30fps , Sub Stream: 2MP: Max. 30fps, Third Stream: D1: Max.30fps
 Up to 4 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 G.711
 Built-in Mic
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile T), API
 Support
 10M/100M Base-TX Ethernet
 Array Range of 30 Mtr., Smart IR
 Up to 8 OSDs
 -35°C ~ 60°C (-31°F ~ 140°F)
 ≤95% RH (non-condensing)
 12 V DC±25%, PoE (IEEE802.3 af)

 **CP- VNC-T51R3C-D****5 MP Full HD WDR Array Bullet Camera - 30Mtr.****Feature**

Power Consumption

Casing

Weatherproof Standard

Dimension

Weight

Specification

Max 6W

Metal

IP67

157.3mm x 62.4mm x 63mm (6.2" x 2.5" x 2.5")

0.45 kg