


CP- UNC-TD61L4E-MD**6 MP Full HD WDR IR Network Bullet Camera - 40Mtr.****Main Features**

- 1/2.9" 6Megapixel PS CMOS Image Sensor
- 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 40 Mtrs, IP67, Micro SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

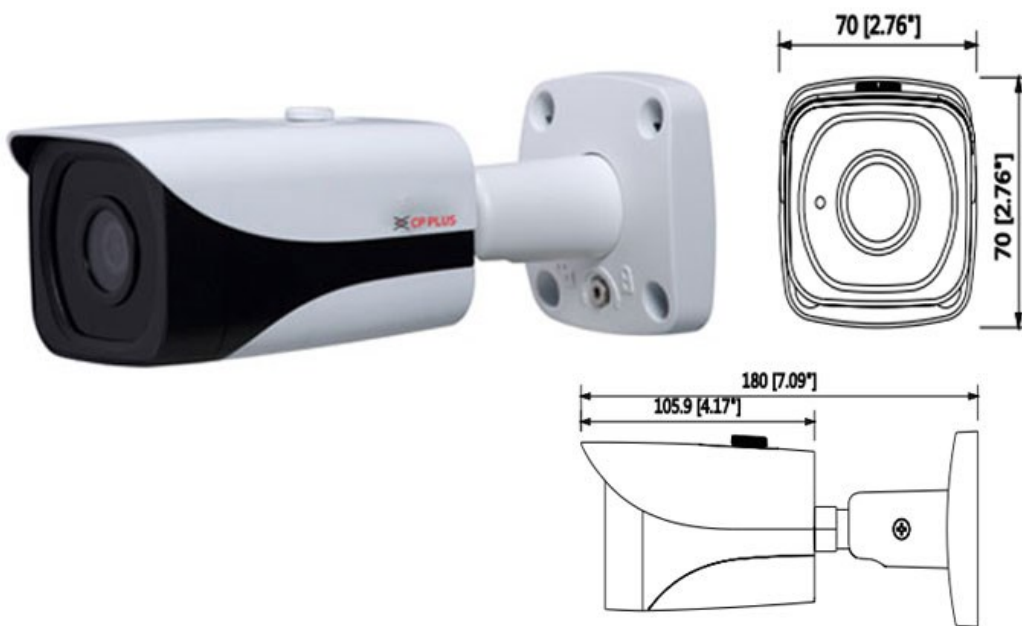

CP- UNC-TD61L4E-MD

6 MP Full HD WDR IR Network Bullet Camera - 40Mtr.



Feature	Specification
Image Sensor	1/2.9" 6Megapixel progressive scan CMOS
Effective Pixels	3072(H) x 2048(V)
Minimum Illumination	0.04Lux/F1.6(Color,1/3s,30IRE), 0.4Lux/F1.6(Color,1/30s,30IRE), 0Lux/F1.6(IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Lens	2.8mm (3.6mm optional)
Gain Control (AGC)	Auto/Manual
Video Compression	H.265+/H.265/H.264+/H.264
Angle of View	H: 98° (69°), V: 67° (48°)
Back Light Compensation	BLC / HLC / WDR(120dB)
S/N Ratio	More than 50dB
Video Streaming	Main Stream: 6MP (1~20fps), 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 1080P(1~25/30fps)
Resolution	(3072x2048)/(3072x1728)/(2592x1944)/(2688x1520)/(2560x1440)/(2304x1296)/1080P (1920x1080)/SXGA(1280x1024)/1.3M(1280x 960)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Bit Rate	H.264: 24K ~ 10240Kbps , H.265: 14K ~ 9984Kbps
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Ethernet	RJ-45 (10/100Base-T)
User Account	20 Users
IR	IR Range of 40 Mtr.
Smart Phone	iPhone, iPad, Android Phone
Micro SD	Micro SD card 128GB
Operating Temperature	-30°C~+60°C, Less than 95% RH



 **CP- UNC-TD61L4E-MD****6 MP Full HD WDR IR Network Bullet Camera - 40Mtr.****Feature**

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

DC12V, ePoE

<6.5W

IP67

180mm × 70mm × 70mm

0.41kg